


# Temposonics®

Magnetostrictive, Absolute, Non-contact  
Linear-Position Sensors

**R-Series Models RP and RH**  
Analog Outputs (Voltage/Current)



R-Series  
Analog

Data Sheet Part Number  
Reference: 550992



**Model RP Profile-style position sensor**  
Stroke length: 25 mm to 5080 mm (1 in. to 200 in.)

**Model RH Rod-style position sensor**  
Stroke length: 25 mm to 7620 mm (1 in. to 300 in.)

## FEATURES

- Linear, Absolute Measurement
- LEDs For Sensor Diagnostics
- Non-Contact Sensing Technology
- Non-Linearity Less Than 0.01%
- Repeatability Within 0.001%
- Direct Analog Outputs (Voltage or Current)
- Single or Dual Channel Outputs (Position + Speed)

## BENEFITS

- Rugged Industrial Sensor
- Dual Magnet Position Measurement
- 100% Field Adjustable Null And Span Setpoints

## APPLICATIONS

- Continuous Operation In Harsh Industrial Conditions
- High Pressure Conditions
- For Accurate, Dual-Magnet Position Measurement

## TYPICAL INDUSTRIES

- Fluid Power
- Factory Automation
- Material Handling and Packaging
- Woodworking, Metalworking and Assembly Tools
- Plastic Injection and Blow Molding



Product Overview and Specifications

Product overview

R-Series model RH and RP sensors are extremely robust and are ideal for continuous operation under harsh industrial conditions.

MTS offers two standard sensor housings, rod and profile extrusion. The rod housing is capable of withstanding high pressures such as those found in hydraulic cylinders. The profile extrusion housing provides convenient mounting options and captive sliding magnets which utilize slide bearings of special material that reduce friction, and help mitigate dirt build up.

The sensor head contains the active signal conditioning and a complete integrated electronics interface. Double shielding is used to ensure EMI protection for unsurpassed reliability and operating safety.

Product specifications

Parameters	Specifications
<b>OUTPUT</b>	
<b>Measured output variables:</b>	Position + speed (magnitude) or velocity (with direction) for single or dual magnets
<b>Resolution:</b>	<b>Position measurement:</b> 16 bit; 0.0015% (minimum 1 µm) <b>Speed measurement:</b> 0.1 mm/s
<b>Non-linearity:</b>	< ± 0.01% full stroke (minimum ± 50 µm)
<b>Repeatability:</b>	< ± 0.001% full stroke (minimum ± 2.5 µm)
<b>Hysteresis:</b>	< 4 µm
<b>Analog Outputs:</b>	<b>Voltage:</b> 0 to 10, 10 to 0, -10 to +10, +10 to -10 Vdc (minimum controller load >5k ohms) <b>Current:</b> 4(0) to 20 mA, 20 to 4(0) mA (minimum/maximum load 0/500 ohms)
<b>Stroke lengths:</b>	<b>Range (Profile style):</b> 25 to 5080 mm (1 to 200 in.) <b>Range (Rod style):</b> 25 to 7620 mm (2 to 300 in.) <b>Range (Flexible 1tyle):</b> 255 to 10,060 mm (10 to 396 in.) <i>(Contact factory for longer stroke lengths)</i> <b>Update times:</b> 0.5 ms up to 1200 mm, 1.0 ms up to 2400 mm, 2.0 ms up to 4800 mm, 5.0 ms up to 7620 mm stroke length
<b>Speed measurement:</b>	<b>Range:</b> 0.025 - 10 m/s (1.0 - 400.0 in./s) <b>Deviation:</b> <0.5% <b>Resolution:</b> 0.1 mm/s (0.004 in./s) <b>Update time:</b> Refer to update times in 'Position measurement' above

Parameters	Specifications
<b>ELECTRONICS</b>	
<b>Operating voltage:</b>	<b>+24 Vdc nominal:</b> -15% or +20% <b>Polarity protection:</b> up to -30 Vdc <b>Over voltage protection:</b> up to 36 Vdc <b>Current drain:</b> 100 mA typical <b>Dielectric withstand voltage:</b> 500 Vdc (DC ground to machine ground)
<b>Setpoints:</b>	<b>Setpoint adjustment (Null/Span):</b> 100% of electrical stroke length. 25 mm (0.98 in.) min. distance between setpoints. <b>For dual-magnet outputs:</b> 76 mm (3 in.) min. distance between magnets
<b>ENVIRONMENTAL</b>	
<b>Operating conditions:</b>	<b>Operating temperature:</b> -40 °C (-40 °F) to +75 °C (+167 °F) <b>Relative humidity:</b> 90% no condensation <b>Temperature coefficient:</b> < 30 ppm/ °C
<b>EMC test:</b>	<b>Emissions:</b> IEC/EN 50081-1 <b>Immunity:</b> IEC/EN 50082-2 IEC/EN 61000-4-2/3/4/6, level 3/4 criterium A, CE qualified
<b>Shock rating:</b>	100 g (single hit)/ IEC standard 68-2-27 (survivability)
<b>Vibration rating:</b>	15 g (30 g with HVR option)/10 to 2000 Hz, IEC standard 68-2-6 (operational)
<b>Wiring</b>	
<b>Connection type:</b>	6-pin male D60 (M16) connector or integral cable
<b>PROFILE STYLE SENSOR (MODEL RP)</b>	
<b>Electronic head:</b>	Aluminum housing with diagnostic LED display (LEDs located beside connector/cable exit)
<b>Sealing:</b>	IP 65
<b>Sensor extrusion:</b>	Aluminum (Temposonics profile style)
<b>Mounting:</b>	Any orientation. Adjustable mounting feet or T-slot nut (M5 threads) in bottom groove
<b>Magnet types:</b>	Captive-sliding magnet or open-ring magnet
<b>ROD STYLE SENSOR (MODEL RH)</b>	
<b>Electronic head:</b>	Aluminum housing with diagnostic LED display (LEDs located beside connector/cable exit)
<b>Sealing:</b>	IP 67 or IP 68 for integral cable models
<b>Sensor rod:</b>	304L stainless steel
<b>Operating pressure:</b>	350 bar static, 690 bar peak (5000 psi static, 10,000 psi peak)
<b>Mounting:</b>	Any orientation. Threaded flange M18 x 1.5 or 3/4 - 16 UNF-3A
<b>Typical mounting torque:</b>	45 N-m (33 ft. - lbs.)
<b>Magnet types:</b>	Ring magnet, open-ring magnet, or magnet float

## Output options

R-Series analog sensors provide single or dual-magnet sensor options along with single or dual-channel outputs (see 'Figure 1').

The R-Series analog sensor can be ordered for single-position magnet applications which provide one position output, and/or one velocity output over the active stroke length.

The R-Series sensor can also be ordered for dual-position magnet applications which provide two position outputs, or two velocity outputs, or one of each.

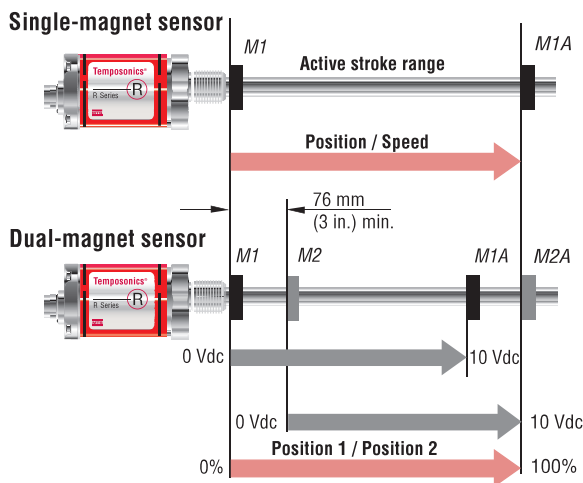


Figure 1. Single and dual-magnet output diagram

When using dual magnets, the minimum allowed distance between the magnets is 76 mm (3 in.) to maintain proper sensor output.

## Enhanced monitoring and diagnostics

### SENSOR STATUS AND DIAGNOSTIC DISPLAY

Diagnostic LEDs (green/red), located beside the connector or cable exit (see 'Figure 2'), provide basic visual monitoring for normal sensor operation and troubleshooting. Diagnostic display LEDs indicate four modes described in 'Table 1'.



Figure 2. R-Series sensor diagnostic LEDs

Green	Red	Operation status/mode
ON	OFF	Normal function (operation mode)
ON	Flashing	Magnet out of setup range
ON	ON	Magnet not detected or wrong quantity of magnets
Flashing	ON	Programming mode

Table 1. Diagnostic LED codes

## Advanced communication and programmability

### SENSOR FIELD PROGRAMMING

Temposonics R-Series Analog sensors are pre-configured at the factory by model number designation. For many applications, normal sensor installation and operation does not require additional adjustment. If however, sensor parameter changes are required in the field, the 'R-Series Analog PC Programming Kit, part no. 253309-1' (see 'Figure 3') can be used to easily program the sensor electronically without opening the sensor's housing.

Field programming to adjust the output values is available for any setting needed, within the selected output range. Each sensor's output range is selected from the available options when ordering a particular sensor model number. There are six different manufacturing build types available, three single channel and three dual channel outputs in various ranges as described below:

#### Single-channel output for either position or speed:

- Voltage output between 0 and +10 volts
- Voltage output between -10 and +10 volts
- Current output between 0 (or 4) and 20 mA

#### Dual-channel outputs for position and/or speed:

- Voltage outputs between 0 and +10 volts
- Voltage outputs between -10 and +10 volts
- Current outputs between 0 (or 4) and 20 mA

#### Field Programming Notes:

Field programming allows for numerous custom sensor configurations, however, please note that field programming can not be used to change the R-Series Analog sensor from one manufacturing build type to another.

#### Field programming (output voltages):

1. Sensor models ordered with *one output channel* can not be reprogrammed in the field to provide a second output channel.
2. Sensor models ordered with *positive only output voltages* can not be reprogrammed in the field to include negative output voltages.
3. Sensor models ordered with *both positive and negative output voltages* can be reprogrammed in the field for positive only voltages, or negative only voltages. However, resolution is then reduced.



Figure 3. R-Series Analog PC Programming Kit, Part no. 253309-1 (For single or dual magnet sensor applications)

Field Programming

Advanced communication and programmability

SENSOR FIELD PROGRAMMING

R-Series Analog PC Programming Kit (Part no.: 253309-1) includes the following components:

- Wall adapter style power supply (24 Vdc output)
- USB Serial converter box with USB cable to connect to PC
- Two connection cables:
  - Cable with connector if sensor is ordered with the D60 integral connector option.
  - Cable with quick connects if sensor is ordered with the integral cable option.
- R-Series Analog PC Setup software, on CD-ROM (for Windows XP or higher)

The R-Series Analog PC Setup software user-friendly interface (see 'Figure 4') enables the operator to take advantage of customizing the following settings:

- Magnet positions and sensor output values for Setpoint 1 (Null) and Setpoint 2 (Span) for single or dual magnets. For additional information about setpoints, refer to section 'R-Series analog handheld programmer for single-magnet sensors'.
- Output range settings for speed, or for speed with direction.
- Assign position or velocity output functions for the single or dual magnets, and for the one or two output channels. Output function assignments are limited to the manufacturing build type of the sensor.
- Assign error output values when the magnet moves beyond the programmed setpoints.

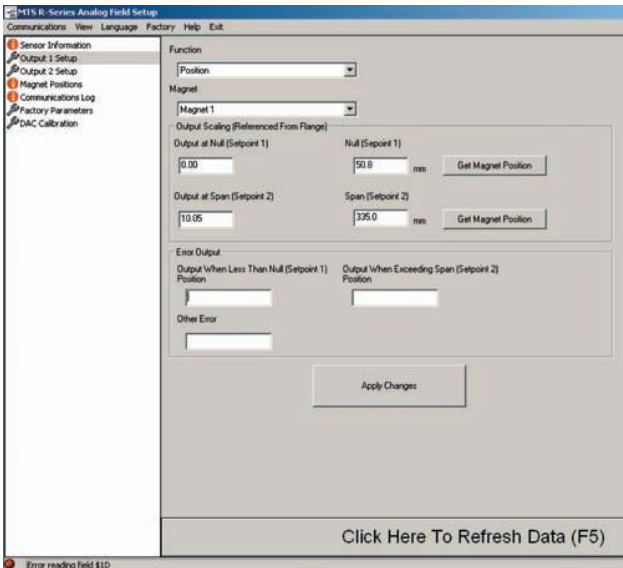


Figure 4. R-Series PC Setup software interface

R-SERIES ANALOG HANDHELD PROGRAMMER FOR SINGLE MAGNET SENSOR APPLICATIONS

The R-Series Analog Handheld Programmer (see 'Figure 5') can be used to program the magnet positions for the start of output, (0% = 0 Vdc, -10 Vdc, 4 mA, or 0 mA), and the end of output, (100% = 10 Vdc or 20 mA), for the single magnet version of the R-Series analog sensor.



Figure 5. R-Series Analog Handheld Programmer, Part no.: 253124

Standard factory settings place the setpoint 1 'Null' and setpoint 2 'Span' at the limits of the sensor's active stroke range. For example, a sensor ordered with 4 - 20 mA output will be factory set for 4 mA output at the bottom limit of the stroke range at the 'Null' position. Likewise, the 20 mA output will be factory set at the top limit of the stroke range at the 'Span' position.

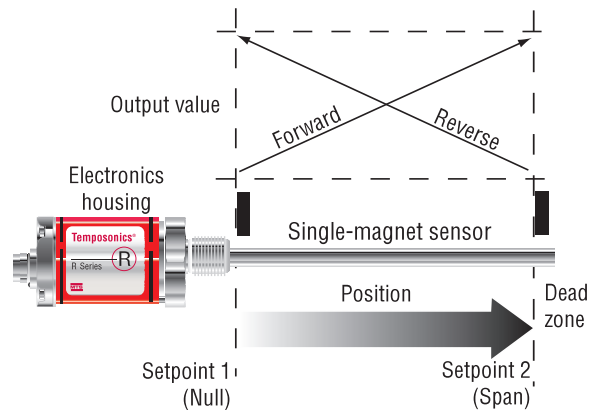


Figure 6. Standard factory settings

Setpoint 1 and setpoint 2 can be re-positioned for the actual measuring length needed anywhere within the active stroke range.

**Note:**  
The minimum distance allowed between setpoint 1 and setpoint 2 is 25 mm (0.98 in.).

These adjustments are easily performed, even when the sensor is not directly accessible, by connecting the analog handheld programmer to the sensor's integral cable or extension cable.

When programming new setpoints, the R-Series Analog Handheld Programmer adjusts the sensor output values to either 0% or 100% at the two selected magnet positions. To program other setpoint output values, use the 'R-Series Analog PC Programming Kit' (Part no.: 253309-1).

**Note:**  
The R-Series Analog Handheld Programmer can also be used to change the output direction from forward-acting (e.g. 4 - 20 mA output) to reverse-acting (20 - 4 mA output), as well as, reverse-acting to forward-acting.

**Model RP Profile-Style Sensor Dimension Reference  
Model RP Standard Magnet Selections and Mounting**

**R-SERIES ANALOG CABINET PROGRAMMER FOR SINGLE MAGNET SENSORS**

The R-Series Analog Cabinet Programmer (see 'Figure 7') provides the same programming functions as the R-Series Analog Handheld Programmer and is designed to mount in a control cabinet. The R-Series Analog Cabinet Programmer includes a rear snap-in mounting feature that allows the unit to mount on standard 35 mm DIN rail.

After installation, the programmer can remain wired up to both the sensor and PLC interface module if reprogramming or a different machine setup is later required, a built-in 'Program/Run' switch allows this programmability.




**Figure 7.** R-Series Analog Cabinet Programmer (two shown) , Part no.: 253408 (for single-magnet sensor applications)

**Model RP profile-style sensor dimension references**

**MODEL RP, PROFILE-STYLE SENSOR WITH CAPTIVE-SLIDING MAGNET**


*Drawing is for reference only, contact applications engineering for tolerance specific information.*

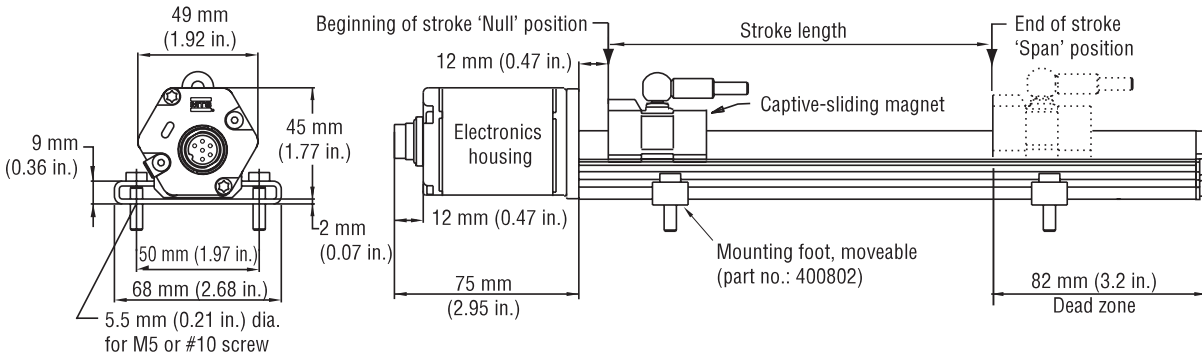

**Figure 8.** R-Series Model RP Profile-style sensor dimension reference (Shown with the **D60** integral connection type option)

**MODEL RP, PROFILE-STYLE SENSOR WITH OPEN-RING MAGNET**

*Drawing is for reference only, contact applications engineering for tolerance specific information.*

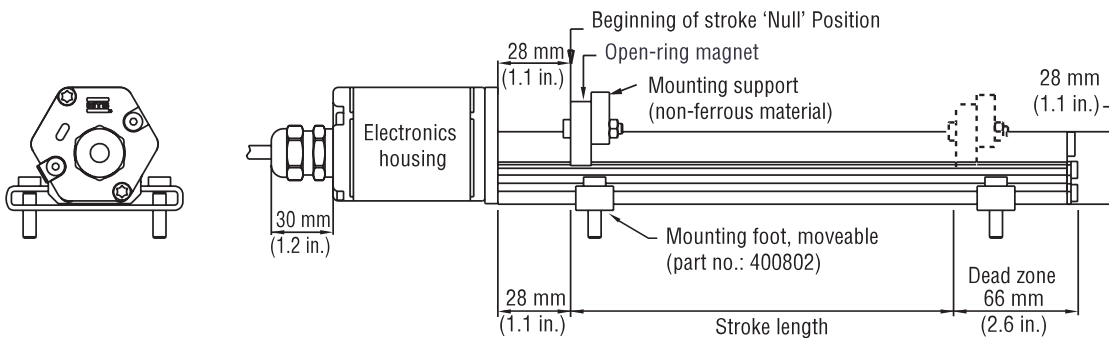

**Figure 9.** R-Series Model RP Profile-style sensor dimension reference (Shown with the **R05** integral cable connection type option)

**Standard magnet selections, mounting and installation (Model RP)**

Temposonics model RP profile-style sensors offer two basic mounting methods; side grooves for use with mounting feet or a bottom groove that accepts special T-Slot nuts. Both the mounting feet and T-Slot nuts can be positioned along the sensor extrusion to best secure the sensor for each particular application.

Refer to the Accessories section of this catalog for magnet selections and detailed mounting and installation information.



**Model RH Rod-Style Sensor Dimension Reference**


**Model RH rod-style sensor dimension references**

The Temposonics R-Series rod-style sensor (Model RH) offers modular construction, flexible mounting configurations, and easy installation. The Model RH sensor is designed for mounting in applications where high pressure conditions exist, (5000 psi continuous, 10,000 psi spike), such as inside hydraulic cylinders. The Model RH sensor may also be mounted externally in many applications.

Stroke-dependent Dead Zones:	
Stroke length:	Dead zone:
25 mm (1 in.) - 5000 mm (197 in.)	63.5 mm (2.5 in.)
5005 mm (197.1 in.) - 7620 mm (300 in.)	66 mm (2.6 in.)

**MODEL RH, ROD-STYLE SENSOR WITH RING MAGNET (MAGNET ORDERED SEPARATELY)**


*Drawing is for reference only, contact applications engineering for tolerance specific information.*

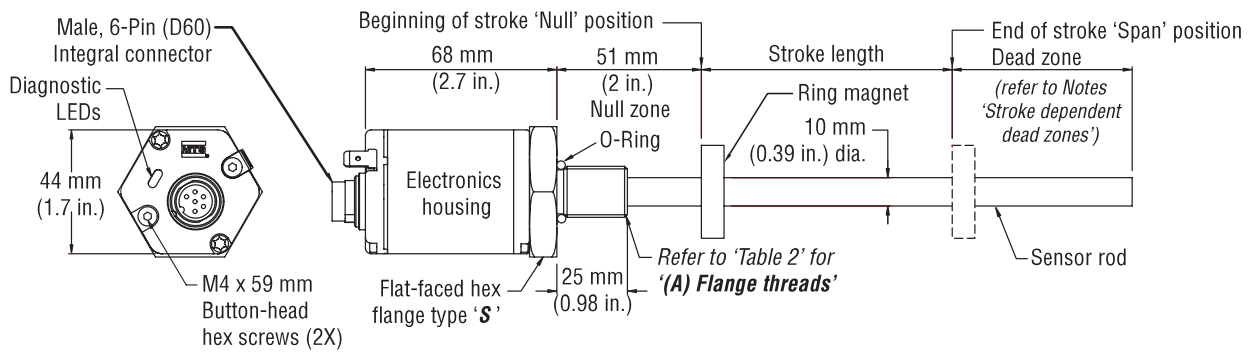

**Figure 10.** Model RH Rod-style sensor dimension reference (shown with the **D60** integral connection)

**MODEL RH, ROD-STYLE SENSOR WITH 6-PIN DIN MATING CABLE CONNECTOR (MAGNET ORDERED SEPARATELY)**

*Drawing is for reference only, contact applications engineering for tolerance specific information.*

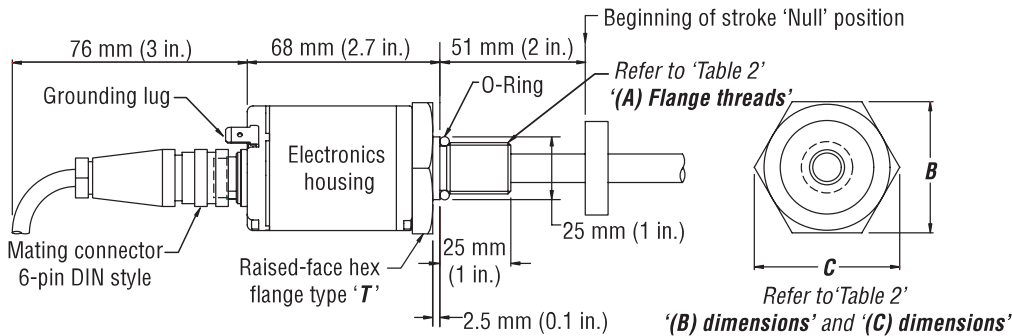


**Figure 11.** Model RH Rod-style sensor dimension reference (shown with mating cable connector)

Housing style Flange type	Description	(A) Flange threads	(B) Dimensions	(C) Dimensions
<b>T</b>	US customary threads with raised-face flange	3/4" - 16 UNF-3A	1.75 in.	2 in.
<b>S</b>	US customary threads with flat-faced flange	3/4" - 16 UNF-3A	1.75 in.	2 in.
<b>M</b>	Metric threads with flat-faced flange	M18 x 1.5	46 mm	53 mm

**Table 2.** Model RH Rod-style sensor housing style and flange type references

## Standard magnets, mounting and installation (Model RH)

Magnets must be ordered separately with model RH position sensors. The standard ring magnet (part number 201542-2) is suitable for most applications

 Refer to the Accessories section of this catalog for magnet, cable connector selections and detailed mounting and installation information.

## Models RP and RH connections and wiring

### STANDARD MALE (D60) 6-PIN DIN INTEGRAL CONNECTOR (M16)

**Note:**


When using the single channel output, (pins 1 and 2), the unused pins for output 2 (pins 3 and 4) should be left floating (unconnected), unless sensor programming is being performed.



Male, 6-pin (D60) integral connector pin-out as viewed from the end of the sensor

Pin Number	Wire Color	Function / Analog outputs
1	Gray	Output 1/ Position 1: 0 to 10, 10 to 0, -10 to +10, +10 to -10 Vdc 4 to 20, 20 to 4, 0 to 20, 20 to 0 mA <i>(Required for programming mode / 0% setting)</i>
2	Pink	Return for pin 1
3	Yellow	Output 2/ Position 2 or Speed: 0 to 10, 10 to 0, -10 to +10, +10 to -10 Vdc 4 to 20, 20 to 4, 0 to 20, 20 to 0 mA <i>(Required for programming mode / 100% setting)</i>
4	Green	Return for pin 3
5	Red or Brown	+24 Vdc (-15/+20%) <i>(Required for programming mode)</i>
6	White	DC ground (for supply) <i>(Required for programming mode)</i>

## Models RP and RH Sensors Ordering Information



(3 to 7 digit code, defined by the output option selected)

**SENSOR MODEL** \_\_\_\_\_ =   1-2

**RP** = Profile style

**RH** = Hydraulic rod style

**RF** = Flexible style

For more information about the model RF, refer to specification part no.: 551081 or Industrial Product Catalog, part no.: 551075

**HOUSING STYLE** \_\_\_\_\_ =  3

**Model RP profile-style sensor (includes one magnet):**

- S** = Captive-sliding magnet with ball joint at top (part no. 252182)
- V** = Captive-sliding magnet with ball joint at front (part no. 252184)
- M** = Open-ring magnet (part no. 251416-2)

**Model RH rod-style sensor (magnet(s) must be ordered separately):**

- T** = US customary threads, raised-faced flange and pressure tube, standard
- U** = Same as option "T", except uses fluoroelastomer seals for the electronics housing
- B** = Sensor cartridge only (no flange and pressure tube, stroke length < 1830 mm (72 in.))
- S** = US customary threads, flat-faced flange and pressure tube, standard
- H** = Same as option "S", except uses fluoroelastomer seals for the electronics housing
- M** = Metric threads, flat-faced flange and pressure tube, standard
- V** = Same as option "M", except uses fluoroelastomer seals for the electronics housing

**Model RF Flexible housing style sensor, (magnet(s) must be ordered separately):**

- S** = US customary threads, flat-faced flange
- M** = Metric threads, flat-faced flange

**STROKE LENGTH** \_\_\_\_\_ =      4-8

**M** = Millimeters (*Encode in 5 mm increments*)

**U** = Inches and tenths (*Encode in 0.1 in. increments*)

**Stroke Length Notes:**

1. Profile-style sensor (model RP) stroke range = 25 mm (1 in.) - 5080 mm. (200 in.)
  2. Rod-style sensor (model RH) stroke range = 25 mm (1 in.) - 7620 mm (300 in.)
  3. Flexible housing style sensor (model RF) stroke range = 255 mm (10 in.) - 10,060 mm (396 in.)
- (Contact factory for longer stroke lengths.)

**CONNECTION TYPE** \_\_\_\_\_ =    9-11

**Integral connector:**

**D60** = 6-pin DIN (M16), male, standard

**Integral cables:**

- R** \_\_\_\_\_ = Integral cable, PVC jacket, pigtail termination, standard
- F** \_\_\_\_\_ = Integral cable, black polyurethane jacket with pigtail termination

**Cable Length Note:**

MTS recommends the maximum integral cable length to be 10 meters (33 ft.). Cables greater than 10 m (33 ft.) in length are available, however, proper care must be taken during handling and installation.

**Cable length:**

Encode in feet if using US customary stroke length  
Encode in meters if using metric stroke length

\_\_\_\_ = 1 (01) to 99 (99) ft. or 1 (01) to 30 (30) meters.

**INPUT VOLTAGE** \_\_\_\_\_ =  12

**1** = +24 Vdc (+20% - 15%)

**A** = Same as option "1" except includes the High Vibration-Resistant (HVR) option for Model RH only, limited to stroke range = 50 mm (2 in.) - 2000 mm (78.7 in.). Refer to 'HVR Option Note'.

**HVR Option Note:**

The High Vibration-Resistant (HVR) option provides the model RH rod-style sensors with increased resistance to shock and vibration for use in heavy duty machinery. Refer to "G-Series and R-Series Sensors for High Shock and Vibration Applications", document part no.: 551073 for more information.

**OUTPUT** (13 - 19) \_\_\_\_\_ =          13-19

3 to 7 digit code defined by the output option selected from pages 12 and 13

**1 Output channel with 1 magnet (3 digit code).**


**Output #1 = Magnet position**

- V01** = 0 to +10 Vdc
- V11** = +10 to 0 Vdc
- V21** = -10 to +10 Vdc
- V31** = +10 to -10 Vdc
- A01** = 4 to 20 mA
- A11** = 20 to 4 mA
- A21** = 0 to 20 mA
- A31** = 20 to 0 mA

CONTINUED ON PAGE 9



**Models RP and RH Sensors  
Ordering Information, Connector and Cable Options**



**2 Output channels with 2 magnets (3 digit code)** \_\_\_\_\_ =    **13 - 15**  
 Choose a value described below to encode 3 digits (sensor part number boxes 13-15) refer to 'Setpoint Note'

<b>Output #1 = Magnet #1 position</b>	<b>Output #2 = Magnet #2 position</b>
<b>V02</b> = 0 to +10 Vdc	0 to +10 Vdc
<b>V12</b> = +10 to 0 Vdc	+10 to 0 Vdc
<b>V22</b> = -10 to +10 Vdc	-10 to +10 Vdc
<b>V32</b> = +10 to -10 Vdc	+10 to -10 Vdc
<b>A02</b> = 4 to 20 mA	4 to 20 mA
<b>A12</b> = 20 to 4 mA	20 to 4 mA
<b>A22</b> = 0 to 20 mA	0 to 20 mA
<b>A32</b> = 20 to 0 mA	20 to 0 mA

**Setpoint Note:**  
 Standard factory settings for the setpoint positions are the same for both magnets, i.e. both magnets have setpoint 1 at the Null position, and setpoint 2 at the Span position. If needed, the setpoint positions for each magnet can be reprogrammed in the field to best fit the application, (see page 4 for more information). For proper sensor output, the minimum allowed distance between magnets is 3 in. (76 mm).

**2 Output channels with 1 magnet (7 digit code)** \_\_\_\_\_ =        **13 - 19**  
 (Choose a maximum speed value described below in Table 3 to encode all 7 digits (sensor part number boxes 13 - 19))

<b>Output #1 = Magnet position</b>	<b>Output #2 = Speed magnitude</b>	
<b>V01</b> _____ = 0 to +10 Vdc	+10 (towards head)	0 (at rest)
<b>V11</b> _____ = +10 to 0 Vdc	+10 (towards head)	0 (at rest)
<b>A01</b> _____ = 4 to 20 mA	20 (towards head)	4 (at rest)
<b>A11</b> _____ = 20 to 4 mA	20 (towards head)	4 (at rest)
<b>Output #1 = magnet position</b>	<b>Output #2 = Velocity (speed with direction)</b>	
<b>V41</b> _____ = 0 to +10 Vdc	0 (towards head)	5 (at rest)
<b>V51</b> _____ = +10 to 0 Vdc	+10 (towards head)	5 (at rest)
<b>V61</b> _____ = 0 to +10 Vdc	-10 (towards head)	0 (at rest)
<b>V71</b> _____ = +10 to 0 Vdc	+10 (towards head)	0 (at rest)
<b>V81</b> _____ = -10 to +10 Vdc	-10 (towards head)	0 (at rest)
<b>V91</b> _____ = +10 to -10 Vdc	+10 (towards head)	0 (at rest)
<b>A41</b> _____ = 4 to 20 mA	4 (towards head)	12 (at rest)
<b>A51</b> _____ = 20 to 4 mA	20 (towards head)	12 (at rest)
<b>Output #1 = Magnet position (forward-acting)</b>	<b>Output #2 = Magnet position (reverse-acting)</b>	
<b>V03</b> = 0 to +10 Vdc (3 digit code)	+10 to 0 Vdc	+10 (towards tip) Vdc
		+10 (towards tip) Vdc
		20 (towards tip) mA
		20 (towards tip) mA

**TABLE 3. FOR SENSOR MODELS WITH SPEED OUTPUT**

(Choose a maximum speed value described below to encode the last 4 digits (sensor part number boxes 16-19))

**For US customary stroke lengths, encode speed for in./s.**

\_\_\_\_\_ = Speed output maximum  
 Available range for US customary stroke lengths is 1.0 to 400.0 in./s, (0010 ... 4000)  
 Example:  
 Maximum speed of 12.0 in./s, and output produced for velocity = [-10(towards head) ... 0(at rest) ... +10(towards tip) Volts]  
 Encode: **V 6 1 0 1 2 0** or **V 8 1 0 1 2 0**

**For metric stroke lengths, encode speed for m/s (range #1) or mm/s (range #2) using the information provided below:**

**Speed range #1, ( 0 \_ \_ \_ )**  
 \_\_\_\_\_ = Speed output maximum  
 Speed range #1 for metric stroke lengths is 0.1 to 10.0 m/s, (0001 ... 0100)  
 Example:  
 Maximum speed of 5.5 m/s, and output produced for speed = [+10(towards head) ... 0(at rest) ... +10(towards tip) Volts],  
 Encode: **V 0 1 0 0 5 5**

**Speed range #2, ( 1 \_ \_ \_ )**  
**1** \_\_\_\_\_ = Speed output maximum.  
 Speed range #2 for metric stroke lengths is 25 to 90 mm/s, (1025 ... 1090)  
 Example:  
 Maximum speed of 50 mm/s, and output produced for velocity = [4(towards head) ... 12(at rest) ... 20(towards tip) mA]  
 Encode: **A 4 1 1 0 5 0**

